

DAHLIA - DAHLIA CT

The Dahlia is a traditional bathroom radiator that retains the timeless character of the bathroom with its simplicity and symmetry of straight, round tubes and D-shaped collectors. This radiator can also be used as a partition wall to create separate areas. Also available with a centre connection.

Product:	the classic bathroom radiator, also available with a centre connection
Also supplied:	wall brackets, screws, plugs, air vent, blind plugs and assembly instructions
Connections:	4 x ½" female connection (6 x ½" if with centre connection)
Packaging:	Every radiator is sturdily packaged in high-quality cardboard and wrapped in plastic. The radiator's characteristics are shown on the label: type – height – length.
Warranty:	5 years, as long as the installation instructions have been followed, Stelrad's warranty conditions have been met and the radiator is installed outside the splash area.
Paint process:	All radiators are degreased, phosphated and powder-coated in Stelrad white 9016 as standard.
Colours:	Stelrad white 9016 + 35 different Stelrad colours and about 200 RAL-colours are possible
Max. operating pressure:	10 bar (tested at 13 bar)
Max. operating temperature:	95 °C
Conformity:	in accordance with EN442
Heights:	775 1.181 1.411 1.763 1.993 mm
Number of tubes:	16 24 28 36 40
Lengths:	495 585 737 mm
Tubes:	horizontal, O-section, diameter 22 mm
Collector:	vertical, D-section




HEAT OUTPUT & DIMENSIONS

Length	495 mm	585 mm	737 mm
Height			
775 mm	367 W	426	522
1181 mm	541 W	627 W	768 W
1411 mm	644 W	746 W	914 W
1763 mm	907 W	934 W	1.145 W
1993 mm	918 W	1.064 W	1.303 W

[Download the Heat calculator](#)

[Download the Correction Factors](#)


CONNECTION POSSIBILITIES

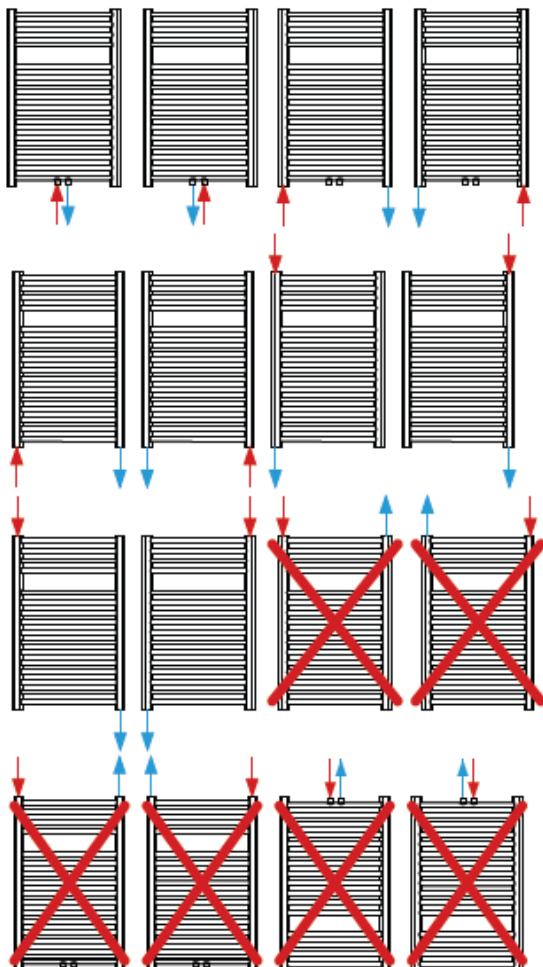

Type Overview

	Length	495 mm	585 mm	737 mm	
Height					Height
775 mm	W	367	425	520	775 mm
	kg	6	6,89	8,4	
	l	3,6	4,01	4,7	
	m ²	0,64	0,74	0,91	
	n	1,2455	1,2484	1,2532	
1181 mm	W	541	627	768	1181 mm
	kg	9	10,23	12,3	
	l	5,4	6,03	7,1	
	m ²	0,97	1,12	1,37	
	n	1,2578	1,2547	1,2495	
1411 mm	W	644	746	914	1411 mm
	kg	10,74	12,22	14,71	
	l	6,43	7,19	8,48	
	m ²	1,14	1,31	1,61	
	n	1,2627	1,2596	1,2542	
1763 mm	W	807	934	1.145	1763 mm
	kg	13,4	15,26	18,4	
	l	7,99	8,94	10,55	
	m ²	1,45	1,68	2,06	
	n	1,2703	1,2670	1,2614	
1993 mm	W	918	1.064	1.303	1993 mm
	kg	13,60	15,48	18,65	
	l	9,15	10,30	12,25	
	m ²	1,62	1,87	2,29	
	n	1,2455	1,2419	1,2359	

INSTALLATION

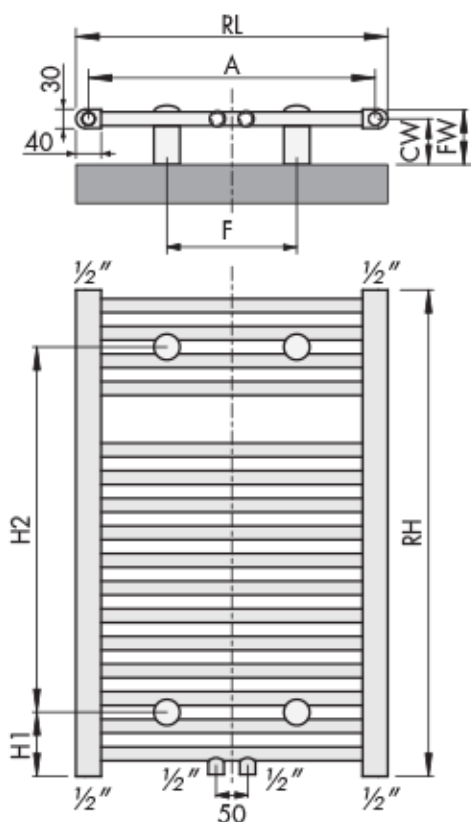

RH	H1	H2
775	102	582
1181	102	988
1411	102	1218
1763	102	1570
1993	102	1800

RL	A	F	CW	FW
495	455	320	65-85	80-100
585	545	410	65-85	80-100
737	697	560	65-85	80-100





STELRAD

Caradon Stelrad B.V. | Kathagen 30 | 6361 HG Nuth | T. +31 (0)455 65 62 62 | F. +31 (0)455 65 62 42

WWW.STELRAD.EU

